



Technical Guide

CDU-M R04A1D 230V 1ph

1. Main product specifications
2. Product diagram
3. Cooling capacities
4. Electric power input

July 2021

100% CO2 condensing units

ECO-FRIENDLY REVOLUTION

This document is the property of SandenVendo Gmbh.
The illustrations in this document are given for information only.
SandenVendo Gmbh reserves the right to modify information in
this document without notice.



1. Main product specifications

		CDU-M R04A1D	
		T°C evap -35°C	T°C evap -10°C
32°C ambient/ Maximum cooling capacity	(kW)	2,19	5,51
32°C amb / Max electric power input	(kW)	2,41	3,52
32°C amb / Minimum cooling capacity	(kW)	0,81	1,95
38°C amb / Maximum cooling capacity	(kW)	2,13	5,05
43°C amb / Maximum cooling capacity	(kW)	1,69	3,94
Seasonal performance SEPR		1,46	2,61
Maximum volume with associated evaporator	(L)	5	15
Maximum piping diameter with associated evaporator	(mm)	9,52 (3/8") *	9,52 (3/8") *
Maximum length to evaporator	(m)	30	30

Evaporating temperature range (Min/Max)	(°C)	-35 ~ +5
Ambient temperature range (Min/Max)	(°C)	-25 ~ +43
Dimensions Height/Width/Depth	(mm)	1300 / 1105 / 285 **
Weight	(kg)	113
Noise pressure level (1)	dB(A) @1m	51
Compressor (x1)		Inverter hermetic Scroll
Speed range	(Hz)	30 - 80
Gascooler	Type	Aluminium microchannel
Refrigerant	Type / GWP	R744 (CO2) / 1
Power supply		1ph+N / 230VAC / 50/60 Hz
Communication	Standard	Modbus
PED	Category	1
Maximum working pressure	MWP	9MPa (LP) / 14 MPa (HP)
Valves dimensions	LP / HP	3/8" (9,52mm) / 1/4" (6,35mm)
Casing color /RAL		RAL 7032






(1) Conditions: ambient T°+32°C, Compressor Speed : 70Hz

*Piping diameter inside evaporator, connection excluded

**without pipe cover

CDU-M

2. Product diagram

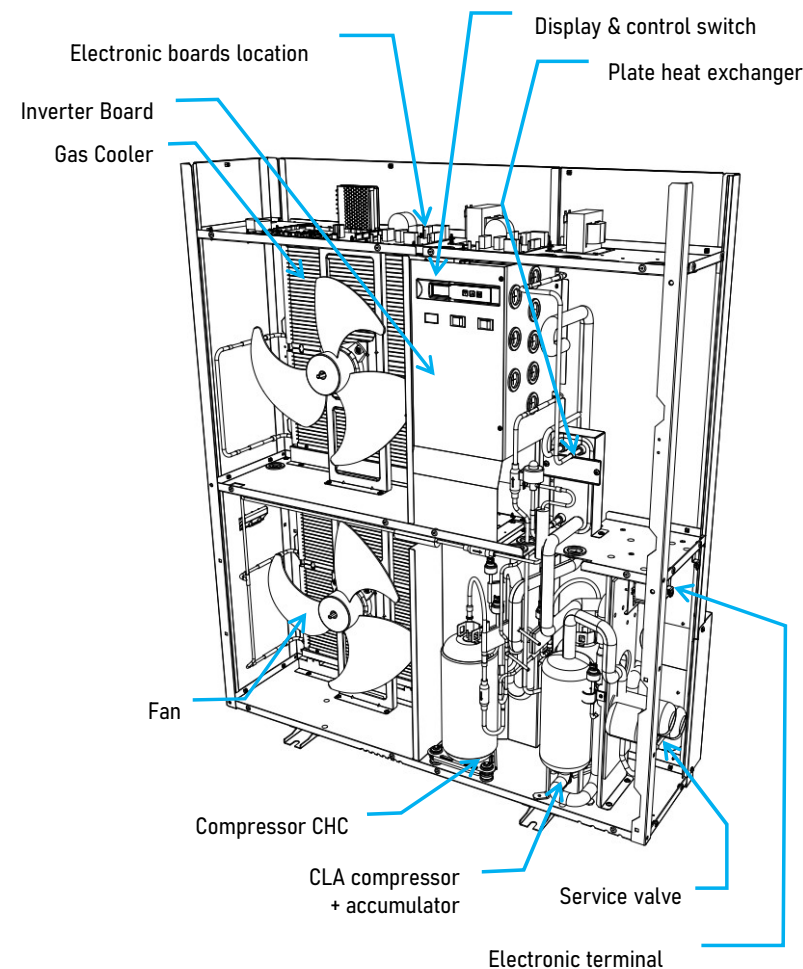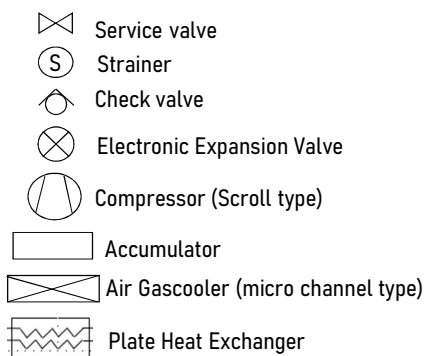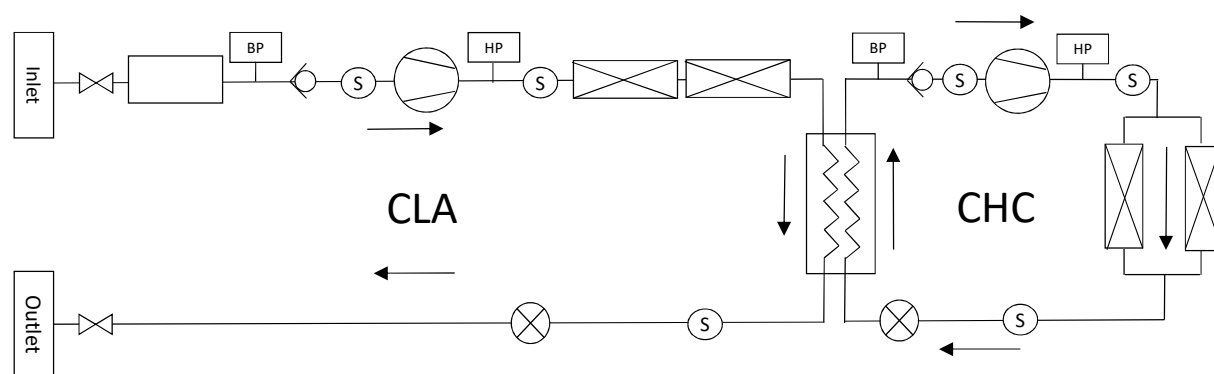

3.1 Cooling capacities & installation sizing

1. Cooling capacities

Ambient Temperature (°C)	CDU-M R04A1D Cooling capacities (kW)						
	Evaporating temperature LT (°C)			Evaporating temperature MT (°C)			
	-35	-30	-25	-10	-5	0	5
32	2,21	2,52	2,74	5,51	6,10	6,67	7,39
35	2,14	2,48	2,64	5,28	5,90	6,45	7,09
38	2,13	2,37	2,45	5,05	5,69	6,22	6,79
40	1,92	2,22	2,34	4,71	5,44	5,87	6,25


- The cooling capacity is linked to the evaporating temperature of the group of the condensing unit and the reference outside temperature of the project
- Notes: The cooling balance of refrigerated showcase is to correlate with the temperature around the furniture (the insulation of the building, or the air conditioning of the sales area can have an impact). In addition, remember to take into account in this balance that the production of cold is generated by an external unit (greater cooling demand compared to centralized cold production)
- SandenVendo Gmbh is not responsible for defining the installation's cooling requirement (cooling balance)
- We recommend to keep 10% margin between the cooling capacity and cooling needs required for the installation
- Consider performance loss depending on the distance between the evaporator and the condensing unit (see next page)

CDU-M R04A1D


3.2 Cooling capacities & installation sizing

2. Piping lenght and performance loss


Single evaporator installation – positive temperature

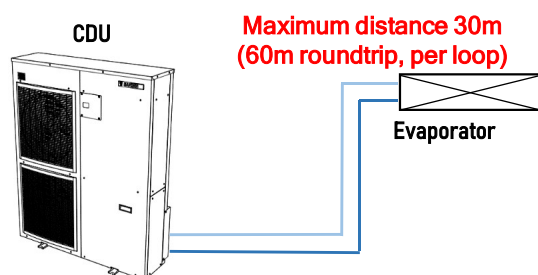

Single evaporator installation – Low temperature

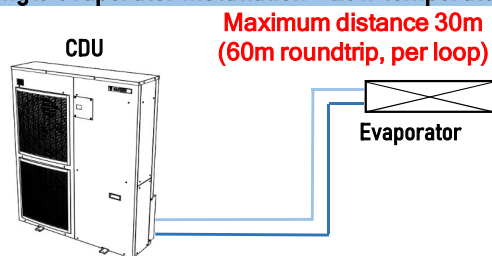

Multi evaporators installation – Positive Temperature

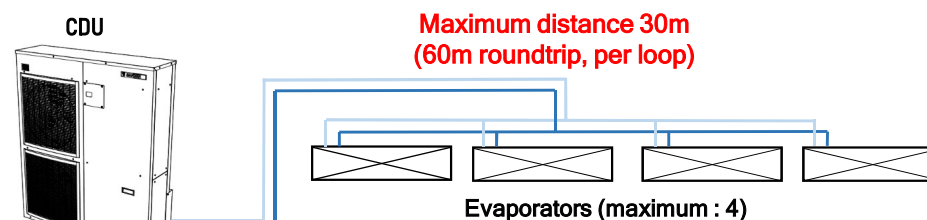

Installation beyond these distances will result with poor performances and poor return of oil to the compressor

In addition, piping length has an impact on the cooling capacity. Opposite, the coefficients to be considered for a reduction in cooling capacity depending on the distance from the evaporator.

Length to the evaporator (m)	10	20	30
MT (positive @Te -5°C)	1,40%	2,80%	4,10%
LT (negative @Te -30°C)	2,80%	5,50%	8,10%

3. Evaporator volume


Medium Temperature: 15 liters maximum (bad oil return if > 15L)

Low temperature: 5 liters maximum (bad oil return if > 5L)


Maximum piping diameter inside evaporator 9,52mm / 3/8" (connection excluded)

4. Electric power input


Power supply
1ph + N / 230VAC / 50/60Hz

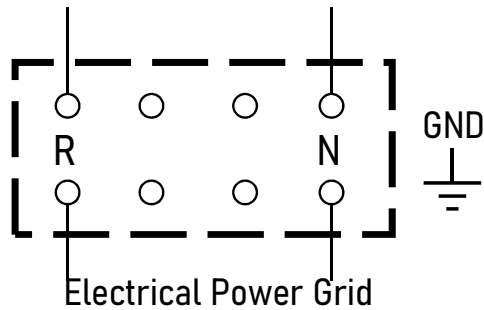


Alarm connection
1ph + N / 230VAC /
3A max (1)



Communication
Modbus type (2)



Cooling demand
Via dry contact(3)

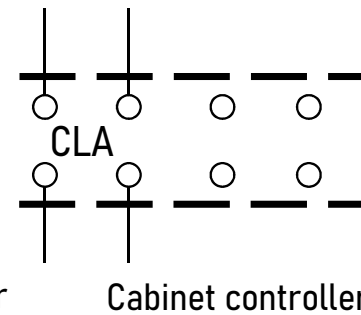

- (1) Alarm delivering 230V in case of error
- (2) Use a shielded cable to connect the modbus
- (3) Cooling demand on dry contact

Rated Power	3,8kW
Voltage	400Vac / 3 phases
Frequency	50/60Hz
Electrical consumption	3,8kW
Rated current	16,7A
Electrical power	3,8kVA
Circuit breaker	20A

